


RETAIL Price List - Valid From November 2020

CORNERED SPEAKERS

With CORNERED speakers, you can enjoy two things in one: unique design and excellent sound.

CORNERED speakers feature a one-of-a-kind 90-degree triangular design that makes for a discreet and elegant installation anywhere in your home - in corners, on the wall, below the ceiling, on shelves and as a centre and rear channel for surround sound.

CORNERED speakers also offer excellent sound quality. They reproduce a natural three-dimensional sound stage that fills your room with sound.

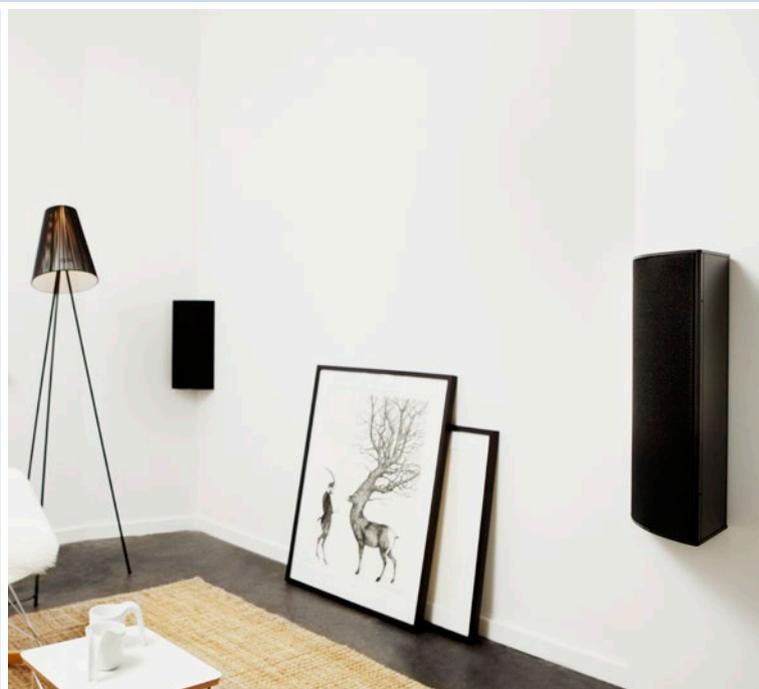

C3 - Black or White (pair)

The C3 is an extremely compact speaker designed for hi-fi and home cinema sound in small to medium sized rooms. It mounts without brackets through the cabinet with only two screws. With a hidden cable terminal, it can be installed discreetly in vertical and horizontal positions. C3 is the perfect choice as a full range speaker for smaller rooms, or as surround speaker for the C4.

4" woofer

1" silk dome tweeter

ABS cabinet with MDF baffle

Power handling, IEC268: 80W

Power handling, peak: 320W

Sensitivity, 2.83V/1m: 86 dB

Maximum SPL, long term: 105 dB

Maximum SPL, peak: 111 dB

Frequency response: 70-25kHz

Nominal impedance: 8 ohm

Weight: 2.7 kg

Measurement: 372x175x121mm

Retail
Ex VAT

Retail
Inc VAT

£333.33

£400.00



RETAIL Price List - Valid From November 2020

| | Retail Ex VAT | Retail Inc VAT |
|--|------------------|-------------------|
| <p>C5 - Black or White (pair)</p> <p>The C5 is a two-way speaker with extended bass performance due to the use of an advanced passive woofer. You will experience surprisingly strong sound pressure from the compact aluminium cabinet and the speaker's high sensitivity – even modest-sized amplifiers will enable the speaker to fill your room with quality sound.</p> <p>5.25" woofer + 5.25" slave 1" silk dome tweeter Aluminium cabinet; black, white & silver finishes Power handling, IEC268: 100W Power handling, peak: 400W Sensitivity, 2.83V/1m: 88 dB Maximum SPL, long term: 108 dB Maximum SPL, peak: 114 dB Frequency response: 59-25kHz Nominal impedance: 8 ohm Weight: 4.1 kg Measurement: 441x213x154mm</p> | £625.00 | £750.00 |
| <p>C5 - Aluminium (pair)</p> | £608.33 | £730.00 |
| <p>C5TRM - Black, White or Aluminium (pair)</p> <p>The Cornered Audio C5TRM delivers very high output for high impact/ low profile home cinema and music applications. The C5TRM offers high SPLs and dynamics with excellent clarity, uniform dispersion and bass reproduction down to 50Hz – all from a discreet corner location.</p> <p>5.25" woofer + 5.25" slave 1" horn-loaded tweeter 90x90 degree dispersion Medium-SPL applications Power handling, IEC268: 150W Power handling, peak: 600W Sensitivity, 2.83V/1m: 90 dB Maximum SPL, long term: 112 dB Maximum SPL, peak: 118 dB Frequency response: 55-20kHz Nominal impedance: 8 ohm Weight: 4.8 kg Measurement: 441x213x154mm</p> | £750.00 | £900.00 |



RETAIL Price List - Valid From November 2020

| | Retail Ex VAT | Retail Inc VAT |
|---|------------------|-------------------|
| <p>C6 - Black, White or Aluminium (pair)</p> <p>Equipped with a woofer custom developed in Denmark, the C6 offers excellent sensitivity and clarity. It has very high output and is recommended in combination with a sub. The extruded aluminium cabinet is well damped and the triangular shape minimises standing waves and reflections within the cabinet. C6 is the perfect choice for a clear, high output and yet compact speaker system.</p> <p>6.5" woofer 1" silk dome tweeter Aluminium cabinet with MDF baffle Power handling, IEC268: 125W Power handling, peak: 500W Sensitivity, 2.83V/1m: 90 dB Maximum SPL, long term: 111 dB Maximum SPL, peak: 117 dB Frequency response: 70-25kHz Nominal impedance: 8 ohm Weight: 5.6 kg Measurement: 502x230x167mm</p> | £766.67 | £920.00 |




| | | |
|---|----------|----------|
| <p>C6TRM - Black, White or Aluminium (pair)</p> <p>The C6TRM is designed with an emphasis on very high output. It features a strong 6.5" neodymium woofer with excellent cooling and a horn-loaded 1" tweeter. Both drivers have excellent power handling and very low power compression. They offer superb dynamics making the C6TRM the perfect choice for home cinema installations involving demanding, dynamic program material. C6TRM can be used in full range applications, but functions best when supported by a sub.</p> <p>6.25" woofer with neo magnet 1" horn loaded dome tweeter Aluminium cabinet Power handling, IEC268: 250W Power handling, peak: 1000W Sensitivity, 2.83V/1m: 92 dB Maximum SPL, long term: 116 dB Maximum SPL, peak: 122 dB Frequency response: 70-20kHz Nominal impedance: 8 ohm Weight: 5.9 kg Measurement: 502x232x167mm</p> | £1166.67 | £1400.00 |
|---|----------|----------|



RETAIL Price List - Valid From November 2020

| | Retail Ex VAT | Retail Inc VAT |
|---|--|-------------------|
| <p>LS1 - Black, White or Aluminium (pair)</p> <p>LS1 is a very compact speaker designed to be flown horizontally in compact Line Source applications. Flying up to 6 pcs per side, the LS1 speakers are designed for medium to high SPL applications in theatres, hotel lobbies, conference rooms and high SPL entertainment venues.</p> <p>6.25" woofer with neo magnet 2x1" horn loaded dome tweeter Aluminium cabinet Power handling, IEC268: 250W Power handling, peak: 1000W Sensitivity, 2.83V/1m: 92 dB Maximum SPL, long term: 116 dB Maximum SPL, peak: 122 dB Frequency response: 70-20kHz Nominal impedance: 8 ohm Weight: 6.4 kg Measurement: 502x232x167mm</p> | £1333.33 | £1600.00 |
| |  | |
| <p>Ci2 - Black or White (pair)</p> <p>The Ci2 is an ultra-compact 2-way full-range speaker.</p> <p>The Ci2 is an ultra-compact 2-way full-range speaker. Patented triangular Cornered design is exceptionally discreet. Integrated mounting points make installation fast and easy. Tweeter waveguide offers very controlled dispersion and increases sensitivity. Indoor or outdoor applications.</p> <p>2.5" low-mid driver 0.75" silk dome tweeter Triangular ABS cabinet IP65 rated Power handling, IEC268: 30W Power handling, peak: 120W Sensitivity, 2.83V/1m: 84 dB Maximum SPL, long term: 99 dB Maximum SPL, peak: 105 dB Frequency response: 140-20kHz Nominal impedance: 8 ohm Weight: 0.75 kg Measurement: 181x135x102mm</p> | £125.00 | £150.00 |
| |  | |

RETAIL Price List - Valid From November 2020
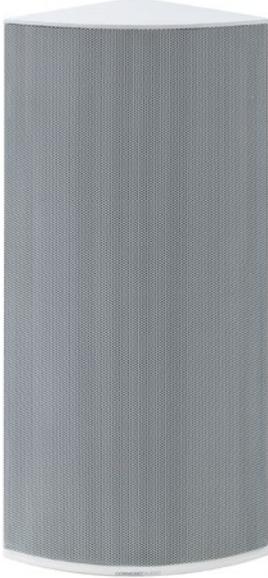
| | Retail Ex VAT | Retail Inc VAT |
|---|--|-------------------|
| <p>Ci4 - Black or White (pair)</p> <p>The Ci4 is a feature packed compact 2-way full-range speaker with a wide and uniform dispersion. Indoor or outdoor applications.</p> <p>4" woofer with 4" slave 1" silk dome tweeter Switchable tweeter protection IP65 certification Power handling, IEC268: 60W Power handling, peak: 240W Sensitivity, 2.83V/1m: 86 dB Maximum SPL, long term: 104 dB Maximum SPL, peak: 110 dB Frequency response: 60-20kHz Nominal impedance: 8 ohm Weight: 2.7 kg Measurement: 400x190x145mm</p> | £250.00 | £300.00 |
| |  | |
| <p>Ci4-V - Black or White (pair)</p> <p>The Ci4-V is a feature packed compact 2-way full-range speaker with a wide and uniform dispersion. The tweeter features a switchable protection circuit for either 8 ohms or 70 / 100V. In high-impedance mode, tap settings for 3.5, 7.5 or 15W output is conveniently located on the front baffle. Indoor or outdoor applications.</p> <p>4" woofer with 4" slave 1" silk dome tweeter IP65 rated Switchable tweeter protection 70/100V mode Power handling, IEC268: 60W Power handling, peak: 240W Sensitivity, 2.83V/1m: 86 dB Maximum SPL, long term: 105 dB Maximum SPL, peak: 111 dB Frequency response: 70-25kHz Nominal impedance: 8 ohm Weight: 3.15 kg Measurement: 400x190x145mm</p> | £283.33 | £340.00 |
| |  | |

RETAIL Price List - Valid From November 2020

| | Retail Ex VAT | Retail Inc VAT |
|--|--|-------------------|
| <p>Ci5 - Black or White (pair)</p> <p>The Ci5 is a feature packed compact 2-way full-range speaker with higher power handling and sensitivity for a wide and uniform dispersion in larger spaces. Indoor or outdoor applications.</p> <p>5.25" woofer + 5.25" slave 1" silk dome tweeter IP65 rated Triangular ABS cabinet Switchable tweeter protection Hidden cable connection Power handling, IEC268: 80W Power handling, peak: 320W Sensitivity, 2.83V/1m: 88 dB Maximum SPL, long term: 107 dB Maximum SPL, peak: 113 dB Frequency response: 55-20kHz Nominal impedance: 8 ohm Weight: 2.9kg Measurement: 450x209x150mm</p> | £333.33 | £400.00 |
| |  | |
| <p>Ci5-V - Black or White (pair)</p> <p>The Ci5-V is a feature packed compact 2-way full-range speaker with higher power handling and sensitivity for a wide and uniform dispersion in larger spaces. The tweeter features a switchable protection circuit for either 8 ohms or 70/100V. In high-impedance mode, tap settings for 3.5, 7.5 15, or 30W output is conveniently located on the front baffle. Indoor or outdoor applications.</p> <p>5.25" woofer + 5.25" slave 1" silk dome tweeter IP65 rated Triangular ABS cabinet Switchable tweeter protection Hidden cable connection Switchable 100/70V mode/8 ohm mode Power handling, IEC268: 80W Power handling, peak: 320W Sensitivity, 2.83V/1m: 88 dB Maximum SPL, long term: 107 dB Maximum SPL, peak: 113 dB Frequency response: 55-20kHz Nominal impedance: 8 ohm Weight: 3.5 kg Measurement: 450x209x150mm</p> | £395.83 | £475.00 |
| |  | |

RETAIL Price List - Valid From November 2020

| | Retail Ex VAT | Retail Inc VAT |
|--|------------------|-------------------|
| <p>C8S - Black or White (pair)</p> <p>The C8S is a compact and shallow on-wall subwoofer. The woofers face the wall and the sound is reflected out to the surroundings, allowing the subwoofer to blend discretely into any modern environment. Featuring a powerful 8" woofer with dual voice coil and a passive radiator to extend the sub-bass performance to below 34 Hz, the C8S has a built-in crossover with heavy duty terminals that allow the cables for the satellite speakers to be connected directly from the C8S. A built in mounting system can double as a footing, so the subwoofer can also be placed on the floor. Alternatively, the feet can be removed for positioning under a sofa or other furniture. Measuring only 16cm deep, the C8S is designed specifically to be used with the Cornered C or Ci series but will also extend any high quality satellite speaker.</p> <p>8" woofer with 8" slave Woofer with dual voice coil Built in crossover On-wall, on-floor or below sofa Painted MDF cabinet Heavy duty screw terminals</p> | £474.17 | £569.00 |
|  | | |
| <p>CA280DSP - Black or White (pair)</p> <p>The CA280DSP is a highly flexible, powerful and compact 2-Channel power amplifier with integrated DSP. It delivers up to 2x140W in 4 or 8 ohm or up to 1x280W in bridge mode. As a unique feature, it can also deliver 280W in 70V/100V mode without using internal transformer. For added flexibility, one channel can run in 4 or 8 ohm while the other channel runs in 100V mode. Designed as a state-of-the-art tool for fixed installation, it provides a full set of DSP features with pre-sets for all Cornered speakers. Automated room EQ is even possible with the use of an external ASIO card and microphone. In addition, CA280DSP creates its own access point for easy set-up via Wi-Fi.</p> <p>USB, RJ45 or Wi-Fi connection for system setup, monitoring and control via remote PC software Simultaneous control of up to 32 units via PC software pre-sets for all Cornered loudspeakers Auto EQ (requires ASIO card and microphone) 24bit/48kHz high end converters 2x140W @ 4ohm or 8ohm 1x280W in 70V/100V Direct Drive 1X250 W in bridge mode - 8 ohm Switch-Mode Power Supply with auto voltage sensing Ultra-low distortion Class D amplifier Full protection circuitry including over-current, over/under- voltage, output, DC and over- temperature</p> | £749.17 | £899.00 |
|  | | |

RETAIL Price List - Valid From November 2020

| | Retail Ex VAT | Retail Inc VAT |
|---------------------------------------|------------------|-------------------|
| CSP2 2 sq mm OFC Speaker Cable | £291.67 | £350.00 |

CSP2 2 sq mm OFC Speaker Cable

In applications where it is not possible to run the speaker cable inside the wall, the Cornered CSP2 offers an elegant on-wall cable solution. With a 100 degree triangular shape and a cut in the back, the Cornered speaker cable is easy to install discreetly in corners or on walls without cable trays. The cable is made by 2 sq mm multi stranded Oxygen Free Copper (OFC) with excellent sound quality. It features double isolation and a white, paintable jacket. The CSP2 is designed to be used with Cornered speakers, but can of course be used with any loudspeaker.

- Triangular speaker cable
- Designed to mount in corners
- White paintable jacket
- 2 sq mm OFC multi stranded wire
- 100m of cable per box

